



# Gefen tv

4X1 Gefen TV Switcher

GTV-HDMI1.3-441

User Manual

[www.gefentv.com](http://www.gefentv.com)

**1080P**  
PROGRESSIVE

**HDMI**  
HIGH DEFINITION MULTIMEDIA INTERFACE

**HDTV**

**Blu-ray Disc**

## ASKING FOR ASSISTANCE

---

### Technical Support:

Telephone (818) 772-9100  
(800) 545-6900

Fax (818) 772-9120

### Technical Support Hours:

8:00 AM to 5:00 PM Monday thru Friday.

### Write To:

Gefen Inc.  
c/o Customer Service  
20600 Nordhoff St  
Chatsworth, CA 91311

[www.gefentv.com](http://www.gefentv.com)  
[support@gefen.com](mailto:support@gefen.com)

### Notice

Gefen Inc. reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

**4x1 Gefen TV Switcher** is a trademark of Gefen Inc.

© 2009 Gefen Inc., All Rights Reserved  
All trademarks are the property of their respective companies

**Rev X3**

# CONTENTS

---

1. Introduction
2. Operation Notes
3. Features / HDMI 1.3 Features / Package Includes
4. Panel Descriptions
5. Connecting and Operating the 4x1 Gefen TV Switcher / Device Buttons / Automatic Switching
6. GTV-4IR Installation
7. IR Code Configuration
8. Wiring Diagram
9. Specifications
10. Warranty

# INTRODUCTION

---

Congratulations on your purchase of the 4x1 Gefen TV Switcher. Your complete satisfaction is very important to us.

## **Gefen TV**

Gefen TV is a unique product line catering to the growing needs for innovative home theater solutions. We specialize in total integration for your home theater, while also focusing on going above and beyond customer expectations to ensure you get the most from your hardware. We invite you to explore our distinct product line and hope you find your solutions.. Don't see what you are looking for here? Please call us so we can better assist you with your particular needs.

## **The Gefen TV Switcher**

Gefen's 4x1 HDMI Switcher routes four HDMI sources with multichannel digital audio to a single HDMI display. Four inputs accommodate the simultaneous connection of up to four high definition video sources, such as satellite systems and HD DVD players. The output sends the high definition audio/video signals to a high definition display. Switching is done via the IR remote that is provided with the unit.

## **How It Works**

You simply connect all your sources to the Switcher's inputs. Then connect the display on the output port. Once the sources, the Switcher and the display(s) are powered and connected, you simply select which source you want to view using the IR remote.

## OPERATION NOTES

---

### READ THESE NOTES BEFORE INSTALLING OR OPERATING THE 4X1 GEFEN TV SWITCHER

- HDMI 1.3 compliant (please see the next page for supported HDMI 1.3 features)
- HDCP compliant
- Compatible with all HDMI and DVI\* displays

\*When used with a HDMI to DVI adapter



# FEATURES

---

## Features

- Connects and Switches up to four HDMI video sources at the same time to one video source
- Included IR Remote control allows switching from a comfortable distance away
- Maintains high resolution video -- beautiful, sharp HDTV resolutions up to 1080p, 2k, and computer resolutions up to 1920 x 1200 are easily achieved
- Allows Simultaneous Displays
- HDCP Compliant

## HDMI 1.3 Features


- Lip-Sync Pass Through
- 340 MHz (up to 16 bit YUV 444 supported @ 1080p)
- Deep Color Supported (XV Color Supported)
- Dolby TrueHD & DTS HD Master Audio Supported
- CEC Pass Through

## Package Includes


- (1) Gefen TV Switcher
- (4) 6' HDMI cable (M-M)
- (1) 5V DC Power Supply
- (1) GTV-4IR Remote Control
- (1) User Manual

# PANEL DESCRIPTIONS

## Front Panel

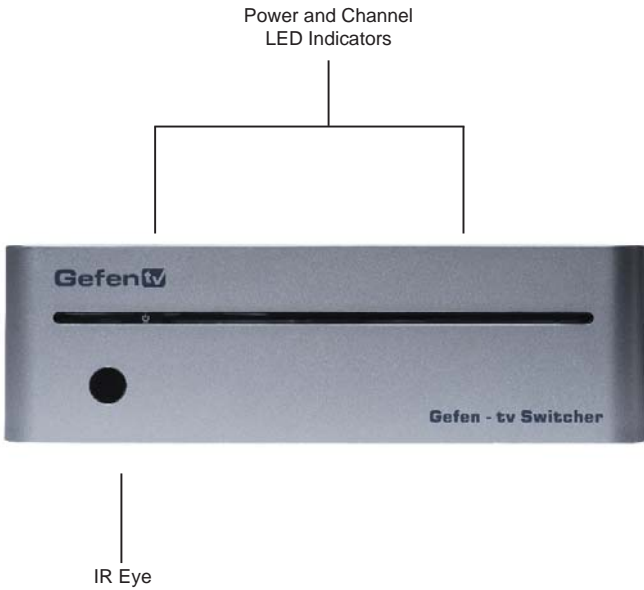

## Back Panel

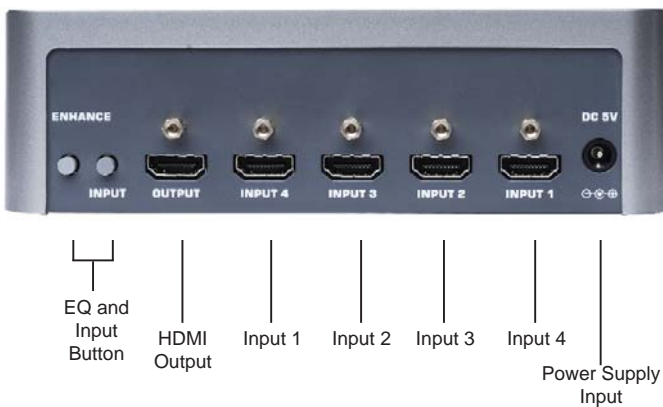

# **CONNECTING AND OPERATING THE 4X1 GEFEN TV SWITCHER**

---

## **How to Connect the 4x1 Gefen TV Switcher**

1. Connect the supplied cables from the HDTV HDMI sources into the Gefen TV Switcher inputs.
2. Connect the cable from your display (monitor or projector) into the HDMI out of the Gefen TV Switcher.
3. Plug the 5VDC power supply into the Gefen TV Switcher.

## **How to Control the Gefen TV Switcher**

Use either the GTV-4IR remote control to toggle between sources or press the input button on the rear of the unit.

## **DEVICE BUTTONS**

---

### EQ Button

By pressing the EQ button you allow the switcher to do a pre-emphasis on the signal. This will help the video signal when long distances or low quality cable is used.

### Input Select Button

Pressing this button will toggle between the inputs in succession.

## **AUTOMATIC SWITCHING**

---


Automatic switching is done very easily. Whenever a connected device is powered on, the 4x1 Gefen TV Switcher will switch to that input. Once that device is powered down, the switcher will revert back to the previous input that was active. The remote and input select button will always allow you to switch manually. The remote will switch discretely to any input, while the input select button will allow you to toggle between inputs.

## GTV-4IR INSTALLATION

---

1. Remove battery cover from the back of the GTV-4IR remote.
2. Verify that dip switches 1 & 2 are in the down (OFF) position.
3. Insert the battery, hold the battery so that you can see the positive side facing up. The side that is not marked must be facing down.
4. Test the GTV-4IR remote by pressing ONLY one button at a time. The indicator light on the remote will flash once each time you press a button. **WARNING:** Do not press multiple buttons simultaneously and do NOT press buttons rapidly.
6. These actions will cause the remote to reset and steps 1-4 will have to be repeated.

Note: The GTV-4IR ships with two batteries. Only one battery is needed for operation, the other is complimentary.

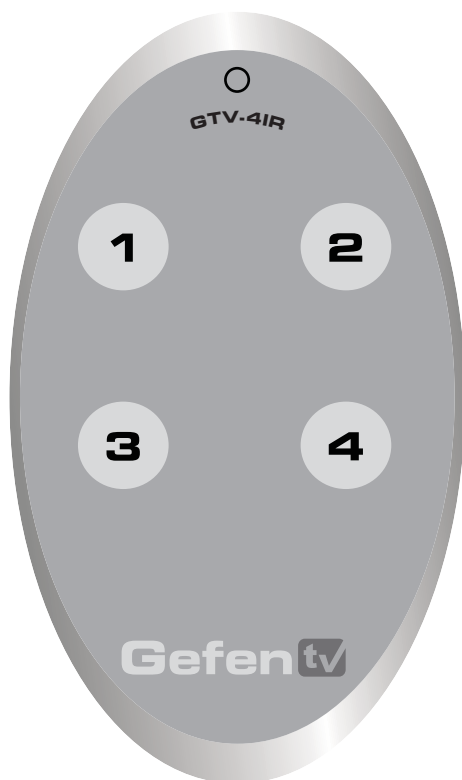

# IR CODE CONFIGURATION

## How to Resolve IR Code Conflicts

If you are experiencing IR conflicts, you can change the IR Code of the remote and switcher. You can do so by holding the EQ button down for 5 seconds and wait for the LED's to flash in front of the unit. The LED's will flash the current IR channel. (One flash for channel 1, two flashes for channel 2, etc.) Press the Input button to select which IR Code channel you wish to use. Press the EQ button to finish. Using the guide below, make sure that the unit and remote are both set to the same channel. If this does not work, please call Gefen's tech support for further assistance.

### Remote



Remote Channel 1:



1 2

Remote Channel 2:



1 2

Remote Channel 3:



1 2


Remote Channel 4:



1 2

# WIRING DIAGRAM

---

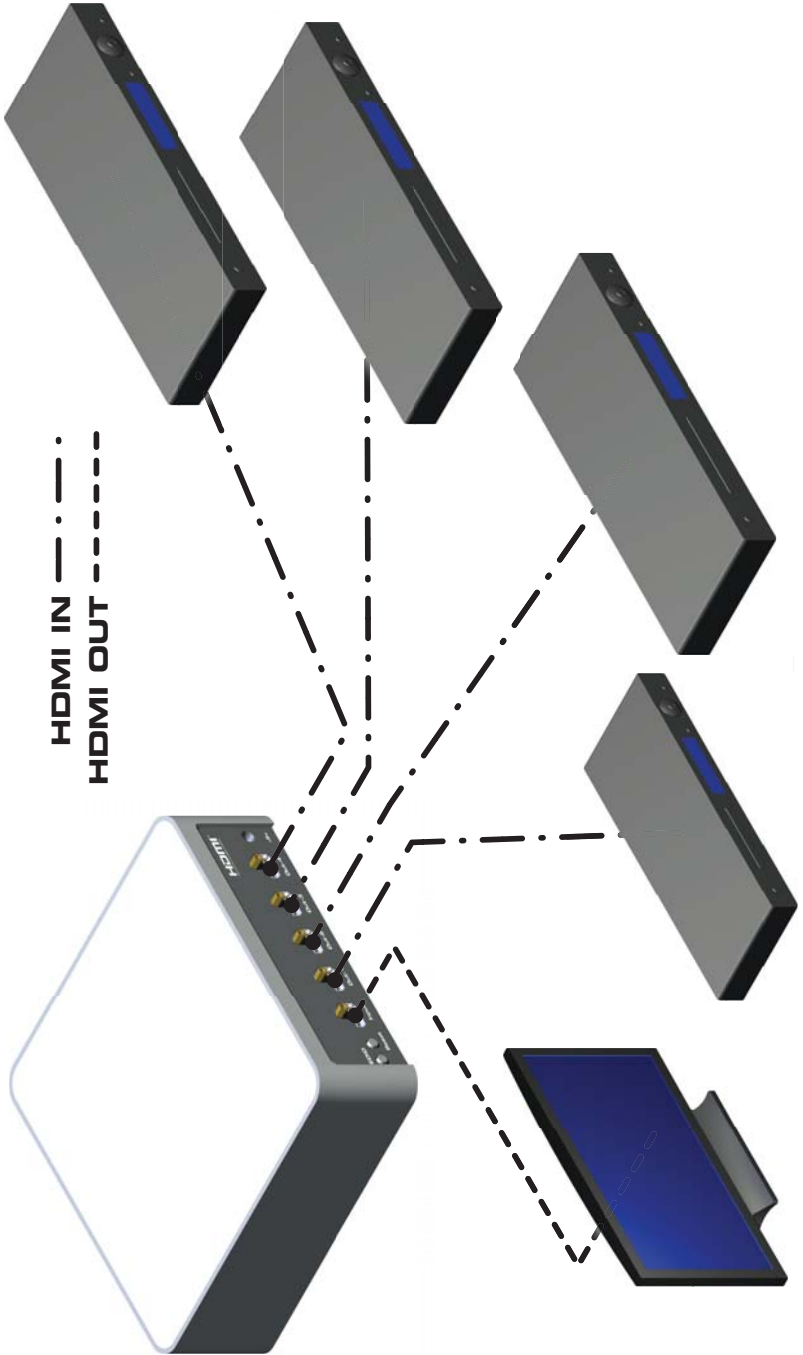

## SPECIFICATIONS

---

|                                 |                             |
|---------------------------------|-----------------------------|
| Video Amplifier Bandwidth ..... | 340 MHz                     |
| Input Video Signal .....        | 1.2 Volts p-p               |
| Input DDC Signal .....          | 5 Volts p-p (TTL)           |
| Single Link Resolution .....    | 1080p 12 bit / 1920 x 1200  |
| Input Connector Type .....      | HDMI Type A 19 pin          |
| Output Connector Type .....     | HDMI Type A 19 pin          |
| Power Consumption .....         | 10 Watts (max.)             |
| Power Supply .....              | 5V DC                       |
| Dimensions .....                | 6.875"W x 2.125"H x 6.875"D |
| Shipping Weight .....           | 5 lbs                       |

## WARRANTY

---

Gefen warrants the equipment it manufactures to be free from defects in material and workmanship.

If equipment fails because of such defects and Gefen is notified within two (2) years from the date of shipment, Gefen will, at its option, repair or replace the equipment, provided that the equipment has not been subjected to mechanical, electrical, or other abuse or modifications. Equipment that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for ninety (90) days from the day of reshipment to the Buyer.

This warranty is in lieu of all other warranties expressed or implied, including without limitation, any implied warranty or merchantability or fitness for any particular purpose, all of which are expressly disclaimed.

1. Proof of sale may be required in order to claim warranty.
2. Customers outside the US are responsible for shipping charges to and from Gefen.
3. Copper cables are limited to a 30 day warranty and cables must be in their original condition.

The information in this manual has been carefully checked and is believed to be accurate. However, Gefen assumes no responsibility for any inaccuracies that may be contained in this manual. In no event will Gefen be liable for direct, indirect, special, incidental, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. The technical information contained herein regarding the features and specifications is subject to change without notice.

For the latest warranty coverage information, please visit Gefen's Warranty web page at <http://www.gefen.com/kvm/aboutus/warranty.jsp>

## PRODUCT REGISTRATION

**Please register your product online by visiting Gefen's web site at <http://www.gefen.com/kvm/Registry/Registration.jsp>**



\* ma - hdmi 1. 3 - 441 \*

**Rev X3**

**20600 Nordhoff St., Chatsworth CA 91311**

**1-800-545-6900 818-772-9100 fax: 818-772-9120**

**www.gefentv.com support@gefentv.com**

