

Gefen TOOLBOX

1:4 Splitter for HDMI®

GTB-MHDMI1.3-144

GTB-MHDMI1.3-144-BLK

User Manual



www.gefentoolbox.com

ASKING FOR ASSISTANCE

Technical Support:

Telephone (818) 772-9100
(800) 545-6900

Fax (818) 772-9120

Technical Support Hours:

8:00 AM to 5:00 PM Monday thru Friday, Pacific Time

Write To:

Gefen, LLC.
c/o Customer Service
20600 Nordhoff St
Chatsworth, CA 91311

www.gefentoolbox.com
support@gefentoolbox.com

Notice

Gefen, LLC reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

1:4 Splitter for HDMI is a trademark of Gefen, LLC

HDMI, the **HDMI** logo, and **High-Definition Multimedia Interface** are trademarks or registered trademarks of HDMI Licensing in the United States and other countries.

© 2010 Gefen, LLC, All Rights Reserved
All trademarks are the property of their respective owners

Rev C2
1.1A

CONTENTS

- 1 Introduction
- 2 Operation Notes
- 3 Features
- 4 Panel Layout
- 5 Panel Descriptions
- 6 Connecting And Operating The GefenToolBox 1:4 Splitter for HDMI
- 7 EDID Management
 - 7 EDID Mode Selection
 - 8 Audio Channel Selection
 - 9 External EDID Management
 - 10 Internal EDID Specification
- 11 Fast Switching Technology
- 12 Wall Mounting Instructions
- 13 Specifications
- 14 Warranty

INTRODUCTION

Congratulations on your purchase of the GefenToolBox 1:4 Splitter for HDMI. Your complete satisfaction is very important to us.

About Gefen

We specialize in total integration for your home theater, while also focusing on going above and beyond customer expectations to ensure you get the most from your hardware. We invite you to explore our distinct product line. Please visit <http://www.gefen.com> for the latest offerings in High-Definition signal solutions or call us between the hours of 8:00 am and 5:00 pm Monday-Friday, Pacific Standard Time for assistance with your A/V needs. We'll be happy to assist you.

Why GefenToolBox?

The GefenToolBox line offers portable and easy-to-install solutions for common A/V system integration setups using HDMI connectivity. GefenToolBox products are wall-mountable and small in size. GefenToolBox products are easily transported in the field and are ready for immediate and simple installations in working environments. These products come finished in a glossy color to blend in with either a white wall or black cabinet.

The GefenToolBox 1:4 Splitter for HDMI

The GefenToolBox 1:4 Splitter for HDMI sends one digital HDMI A/V source to 4 HDMI-compliant displays at the same time. It supports all HDMI equipment such as Blu-ray and DVD players, satellite set-top boxes, and all HDMI displays. Features include transmission of high-def deep color video resolutions up to 1080p@60 Hz combined with advanced lossless digital audio formats for pristine sound reproduction.

How It Works

Connect your HDMI A/V source to the Splitter's input using the supplied HDMI cable. Connect up to four (4) HDMI-compliant displays to the Splitter's four (4) HDMI outputs. 3D content can be displayed when connecting a 3DTV and 3D source. Apply power to sources and displays. The source signal will now be seen on all four displays at the same time.

OPERATION NOTES

READ THESE NOTES BEFORE INSTALLING OR OPERATING THE GEFENTOOLBOX 1:4 SPLITTER FOR HDMI

- EDID contains the A/V capabilities of a display device in regards to video resolutions and audio formats supported. This information is used by the source device to determine the format of the A/V signal it outputs. The GefenToolBox 1:4 Splitter for HDMI has advanced EDID management features to ensure complete compatibility with all sources and display devices. See pages 7-10 for more details.

FEATURES

HDMI 1.3 Features

- 225 MHz (up to 12 bit YUV 444 @ 1080p)
- Deep Color
- Dolby TrueHD and DTS-HD Master Audio
- Lip-Sync

Features

- Simultaneously displays a single Hi Def source on up to four (4) HDTV displays without signal loss.
- Maintains high resolution video - beautiful, sharp HDTV resolutions up to 1080p and 1920x1200@60 Hz.
- 3DTV Pass-Through
- Fast Switching Technology for quick and responsive HDMI signal routing.
- Auto-EDID Management for rapid integration of sources and display devices.
- Supports modern advanced digital audio formats including LPCM 7.1 audio, Dolby Digital Plus, Dolby TrueHD, and DTS-HD Master Audio.
- Supports the use of DVI sources and DVI displays with an HDMI-to-DVI converter cable or adapter.
- Input and output cables can be as long as 15 feet when using 8-bit or 12-bit color. The length of input and output cables also depends on the quality of cables used.
- This product is HDMI-compliant and HDCP-compliant.

Package Includes

- (1) GefenToolBox 1:4 Splitter for HDMI
- (1) 6 ft. HDMI cable (M-M)
- (1) 5V DC Locking Power Supply
- (1) User Manual

PANEL LAYOUT



PANEL DESCRIPTIONS

1 HDMI Output Ports 1-4

Connect HDMI-compliant display device(s) to any of these output ports.

2 Audio Channel Selection Switch

This switch will modify the EDID to specify the number of supported audio channels when using the INTERNAL EDID mode. This setting will not affect the EDID information when using the EXTERNAL EDID mode.

3 EDID Mode Selection Switch

This switch will control the location of the EDID that will be sent to the source device. The options are EXTERNAL and INTERNAL. Please see pages 7-11 for more information.

4 USB Service Port

Mini-USB service port used for upgrading the firmware.

5 Locking HDMI Port

Connect an HDMI source device to this port. The signal from this port will be replicated to all HDMI output ports. Please see the Features section on page 3 for supported HDMI 1.3 features.

6 5V DC Locking Power Receptacle

Connect the included 5V DC locking power supply between this receptacle and a power source. Only use the power supply supplied with this unit. Screw the locking power tip into the socket on the Splitter until it fits snugly.

7 Power Indicator LED

This LED will become active once the included 5V DC locking power supply has been properly connected to the unit and a power source.

CONNECTING AND OPERATING THE GEFEN TOOLBOX 1:4 SPLITTER FOR HDMI


How to Connect the GefenToolBox 1:4 Splitter for HDMI

1. Use the supplied HDMI cable to connect the source device to the HDMI input port of the GefenToolBox 1:4 Splitter for HDMI.
2. Use additional user-supplied HDMI cables to connect up to 4 HDMI-compliant displays to the output ports on the 1:4 Switcher for HDMI.
3. Connect the included 5V DC power supply to the power receptacle on the Splitter.
4. Connect the other end of the power supply to an available power outlet.

How to Operate the GefenToolBox 1:4 Splitter for HDMI

The GefenToolBox 1:4 Splitter for HDMI does not require any configuration to begin splitting the incoming HDMI input signal. However, depending on the features required by the user, the EDID Mode and Audio Channel Selection switches may need to be adjusted. See the following section for more information on the usage of these switches.

Wiring Diagram for the GefenToolBox 1:4 Splitter for HDMI

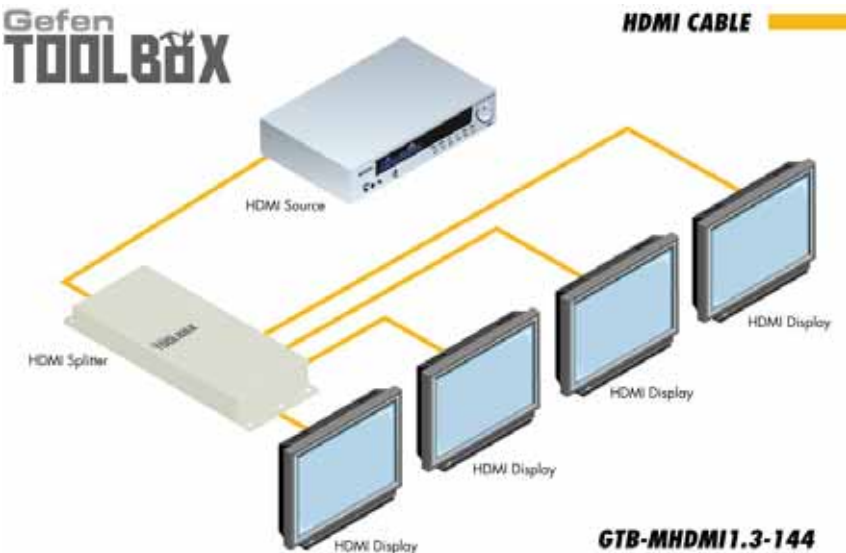

EDID MANAGEMENT

EDID Mode Selection

1. EXTERNAL MODE:

See page 9 for details on using the External EDID.

2. INTERNAL MODE:

In Internal EDID Mode, a generic EDID is used for all connected devices. This is useful when sufficient EDID data is unavailable from display devices or EDID-related problems are encountered. The generic EDID is compatible with most A/V equipment on the market.

Set the EDID Mode Switch on the front panel to the **INT** position. This mode uses a standard, pre-programmed EDID at the factory which is compatible with most A/V display devices. All video resolutions and audio formats specified in this EDID will be passed to the source device. For a complete definition of the A/V formats in this internal EDID please see page 10.

NOTE: All other HDMI-capable devices/displays connected to the Output ports **MUST** be compatible with at least one resolution/audio format specified in this EDID. It is recommended to set a commonly supported video resolution and audio format on the source device, to be shared by all attached devices/displays. This is to ensure that a compatible signal is output to all connected devices/displays.

Audio Channel Selection

The GefenToolBox 1:4 Splitter for HDMI features a switch that will modify the supported audio formats listed in the pre-programmed EDID. This feature is useful for limiting the output of the source device to either 2 or multi-channel audio formats.

NOTE: This selector switch will only affect the pre-programmed EDID in the INTERNAL (INT) EDID Mode.

The GefenToolBox 1:4 Splitter for HDMI can use either of the following settings for audio format support:

1. **2 Channel:** This setting will limit the audio formats listed in the pre-programmed EDID to 2 channel LPCM. For a full listing of the audio formats in this mode please see page 10.

To use this mode, set the Audio Selection Switch on the front panel to the **2 CH** position.

This mode is useful in scenarios where all output devices/displays are HDTV monitors that only support 2 channel LPCM. This setting will ensure that all connected devices will receive and produce sound.

2. **Multi-Channel:** This setting will enable all common audio formats in the pre-programmed EDID. For a full listing of the audio formats in this mode please see page 10.

To use this mode, set the Audio Selection Switch on the front panel to the **Multi CH** position.

This mode is useful in scenarios where the output devices/displays are varying devices (i.e. HDTV display and audio receivers). Please note that sound may not be heard from all output devices/displays if a shared common audio format is not used by the source device.

EDID MANAGEMENT

External EDID Management

The GefenToolBox 1:4 Splitter for HDMI features EDID Management. Before the source can send video or audio signals to the display, the source device reads the EDID (Extended Display Identification Data) of each device connected to an output. The EDID contains information about what type of A/V data that the source can send to each display.

GefenToolBox 1:4 Splitter for HDMI distributes a single source to multiple output devices. This involves reading EDID data from more than one device. Management of the EDID data is important to maintain compatibility between all devices.

Display Connections

- If a display is not connected to Output 1, then no EDID changes are made, meaning that the previous EDID information will be used. This state will be in effect until a display is connected to Output 1 and the Splitter is power-cycled.
- EDID is copied from Output 1 to all other outputs. The audio block will be copied from Output 1. EDID-copying is performed only when the Splitter is reset or power-cycled.

3DTV Support

- 3D signals are supported if a 3DTV is connected to Output 1.

Deep Color

- Deep Color will be *disabled* if one of more other displays connected to the Splitter do not support Deep Color.

EDID MANAGEMENT

Internal EDID Specifications

The table below lists the settings that comprise the built-in Internal EDID data structure:

Video Data Block	Audio Data Block	Speaker Allocation	xvYCC
1080p@60Hz	2-channel:	2-channel:	xvYCC 709
1080p@50Hz	LPCM 2CH	FL/FR	xvYCC 601
1080i@60Hz (native)	Multi-channel:	Multi-Channel:	
1080i@50Hz	LPCM 2CH LPCM 8CH AC-3 6CH DTS 7CH Dolby Digital+ 8CH Dolby TrueHD 8CH DTS-HD 8CH MAT(MLP) 8CH	RLC/RRC RL/RR FC LFE FL/FR	



Fast Switching Technology

Fast Switching Technology (FST) is a Gefen software implementation for HDMI 1.3 products. FST was created to improve the inherited lengthy HDMI authentication process, based on the HDMI and HDCP specifications.

FST provides quicker A/V source switching and greatly improves the overall A/V system behavior and performance when more than one HDTV display is used in the system setup.

FST allows connecting / disconnecting or turning ON / OFF of HDTV displays without having these activities affect other Hi-Def sources routed to any other HDTV display in the same system.

WALL MOUNTING INSTRUCTIONS



The GefenToolBox 1:4 Splitter for HDMI should be mounted vertically in a wall or cabinet with wood/drywall screws as shown in the diagram above. There should be an inch or two of clearance between the edges of the unit and any walls or vertical surfaces to allow for enough clearance for insertion and retraction of cables at the HDMI connectors.

For installation on a drywall surface, use a #6 drywall screw. It is recommended when installing on a drywall surface that studs be used to secure the Splitter should undue stress be applied when connecting and disconnecting HDMI cables.

SPECIFICATIONS

Single Link Bandwidth	225 MHz
Pixel Clock / Speed	165 MHz
Maximum Video Resolution	1080p, 1920x1200@60Hz, 2K
Input Video Signal	1.2 volts p-p
Input DDC Signal	5 volts p-p (TTL)
HDMI Input Connector	type A 19-pin, female
HDMI Output Connectors	type A 19-pin, female
Power Indicator	LED, red
EDID Mode Switch	SPDT
Audio Mode Switch	SPDT
Power Supply	5V DC
Power Consumption	10 W (max.)
Dimensions	3" W x 10.5" H x 0.75" D
Operating Temperature	0 - 40 °C
Compliance.....	US/EU Standards, HDMI 1.3, HDMI 1.2, HDCP 1.1, DVI 1.0
Certifications.....	UL (power supply), RoHS, CE
Shipping Weight	3 lbs.

WARRANTY

Gefen warrants the equipment it manufactures to be free from defects in material and workmanship.

If equipment fails because of such defects and Gefen is notified within two (2) years from the date of shipment, Gefen will, at its option, repair or replace the equipment, provided that the equipment has not been subjected to mechanical, electrical, or other abuse or modifications. Equipment that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for ninety (90) days from the day of reshipment to the Buyer.

This warranty is in lieu of all other warranties expressed or implied, including without limitation, any implied warranty or merchantability or fitness for any particular purpose, all of which are expressly disclaimed.

1. Proof of sale may be required in order to claim warranty.
2. Customers outside the US are responsible for shipping charges to and from Gefen.
3. Copper cables are limited to a 30 day warranty and cables must be in their original condition.

The information in this manual has been carefully checked and is believed to be accurate. However, Gefen assumes no responsibility for any inaccuracies that may be contained in this manual. In no event will Gefen be liable for direct, indirect, special, incidental, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. The technical information contained herein regarding the features and specifications is subject to change without notice.

For the latest warranty coverage information, please visit Gefen's Warranty web page at <http://www.gefen.com/kvm/aboutus/warranty.jsp>

PRODUCT REGISTRATION

Please register your product online by visiting Gefen's web site at <http://www.gefen.com/kvm/Registry/Registration.jsp>

Rev C2
1.1A



20600 Nordhoff St., Chatsworth CA 91311
1-800-545-6900 818-772-9100 fax: 818-772-9120
www.gefentoolbox.com support@gefentoolbox.com

