




CAT-5 WALL PLATE EXTENDER FOR HDMI 1.3 QUICK START GUIDE

Congratulations on your purchase of the Gefen CAT-5 Wall Plate Extender for HDMI 1.3. Your complete satisfaction is very important to us. Please read these instructions thoroughly before installing and operating your new extension cable.

Installation:

1. Connect one CAT-5e or CAT-6 to the Cable 1 port on the Output wall plate jack and connect the opposite end of the CAT-5e or CAT-6 cable to the Cable 1 port on the Input wall plate jack.
2. Connect one CAT-5e or CAT-6 to the Cable 2 port on the Output wall plate jack and connect the opposite end of the CAT-5e or CAT-6 cable to the Cable 2 port on the Input wall plate jack.
3. Connect an HDMI cable from the Input wall plate jack to your source.
4. Connect an HDMI cable from the Output wall plate jack to your display.

Connection Diagram

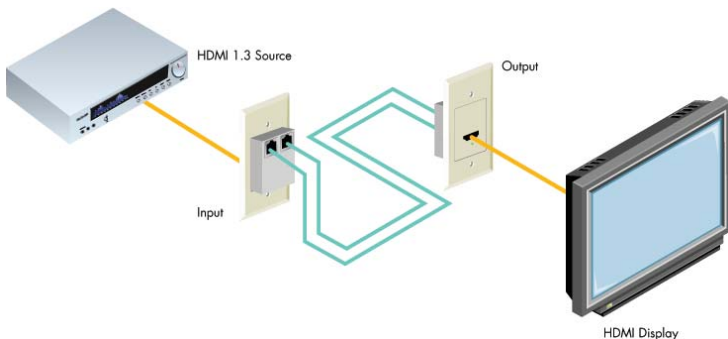



Specifications:

Bandwidth:	1.65 GHz
Supported Resolutions:	HDMI 1.3, DVI 1.0, HDCP 1.1
DTV/HDTV:	1080p / 1080i / 720p / 720i / 480p / 576i / 480i
Transmission Distance:	Solid CAT6 STP 23 AWG 27m @ 1080p Solid CAT6 UTP 23 AWG 25m @ 1080p Solid CAT5 STP 24 AWG 20m @ 1080p Solid CAT5 UTP 24 AWG 20m @ 1080p
Size:	114.5mm x 70mm x 29.5mm
Weight (Net):	0.200KG
Power Consumption:	10W (max)
Operating Temperature:	0 to +70°C
Operating Humidity:	10% to 80% RH
Storage Temperature:	0 to +80°C
Storage Humidity:	5% to 95% RH

Package Includes:

- CAT5 Wall Plate Extender for HDMI 1.3 Sender
- CAT5 Wall Plate Extender for HDMI 1.3 Receiver